


ARROW STYLE TRAFFIC ADVISORS™

These big bright left and right arrow head halogen or LED Traffic Advisors direct real-time visual communication with clear signal sequencing to oncoming traffic in hazardous highway maintenance or accident situations. These unique moving flash patterns assure quicker recognition at greater distances.

- All models have four operating modes (left, right, split and flash) with eight programmable flash patterns.
- Housings have removable arrow heads for ease of storage and shipping
- Six 3/8" slide bolts which allow easy mounting on vertical surfaces or to user supplied brackets
- All include TACTRL3A control head, except Model TA1660L which is Serial Communication and comes standard with a TACTRL2 control head
- Available in 5', 6', 7' or 8' lengths (specify length when ordering)
- Twenty-five foot, 16 conductor cable supplied with arrow (two piece arrows have ten feet of inter-connect cable between light arrays)
- Meets MUTCD2000 specifications when mounted on appropriate backboard.

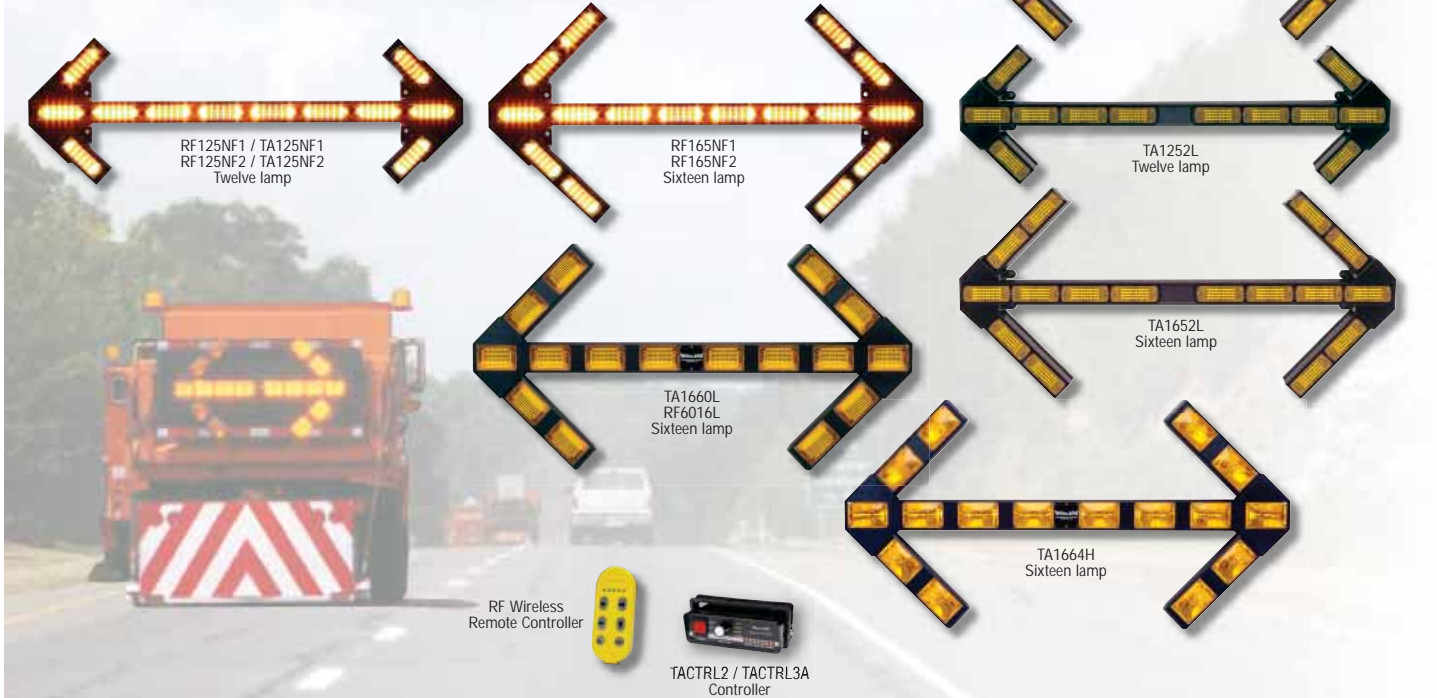

Model No.	Technology	Number & Size of Modules	Power Cable	Mount	Control Head	VDC	Housing	Size H x D x L	
TA1652H	500 Series Halogen	16 (5"x2")	25'	Surface mount/ slide bolt	TACTRL3A	12	One piece	23-1/4" (590mm) x 5-1/4" (133mm) x 48" (122cm)	
TA8852H							Split 2 piece	23-1/4" (590mm) x 5-1/4" (133mm) x 27-11/16" (703mm, ea. section)	
TA1664H	600 Series Halogen	16 (6"x4")	One piece				36-1/2" (927mm) x 3-3/16" (81mm) x 5' (152cm), 6' (183cm), 7' (213cm), & 8' (244cm)		
TA1252L	500 Series LED	12 (5"x2")	One piece				16" (41mm) x 5-1/4" (133mm) x 48" (122cm)		
TA1652L	500 Series LED	16 (5"x2")	One piece		23-1/4" (590mm) x 5-1/4" (133mm) x 48" (122cm)				
TA1660L	600 Series LED Serial Comm.	16 (6"x4")	40'		TACTRL2		One piece	36-1/2" (927mm) x 3-3/16" (81mm) x 5' (152cm), 6' (183cm), 7' (213cm), & 8' (244cm)	
TA125NF1	500 Series LIN6 Super-LED® Front Load	12 (5"x2")	25'		TACTRL3A		12	Front load one piece	15" (381mm) x 3-1/2" (89mm) x 46" (117cm)
TA125NF2	500 Series Linear Super-LED Front Load	16 (5"x2")	50'						23-1/4" (590mm) x 3-1/2" (89mm) x 46" (117cm)
RF125NF1	500 Series LIN6 Super-LED Front Load	12 (5"x2")	25'						15" (381mm) x 3-1/2" (89mm) x 46" (117cm)
RF125NF2	500 Series Linear Super-LED Front Load	16 (5"x2")	50'						23-1/4" (590mm) x 3-1/2" (89mm) x 46" (117cm)
RF165NF1	500 Series Linear Super-LED Front Load Wireless Radio Control	16 (5"x2")	25'	RF6016L Wireless Remote Controller	12	Front load one piece	15" (381mm) x 3-1/2" (89mm) x 46" (117cm)		
RF165NF2			50'				23-1/4" (590mm) x 3-1/2" (89mm) x 46" (117cm)		
RF6016L	600 Series LED Front Load Wireless Radio Control	16 (6"x4")	30' TPR				36-1/2" (927mm) x 3-3/16" (81mm) x 48" (122cm)		