


ARROW STYLE TRAFFIC ADVISORS™

These big bright left and right arrow head halogen or LED Traffic Advisors direct real-time visual communication with clear signal sequencing to oncoming traffic in hazardous highway maintenance or accident situations. These unique moving flash patterns assure quicker recognition at greater distances.

- All models have four operating modes (left, right, split and flash) with eight programmable flash patterns
- Extruded aluminum housings with black finish have removable arrow heads for ease of storage and shipping
- Six 3/8" slide bolts which allow easy mounting on vertical surfaces or to user supplied brackets
- All include TACTRL3A control head, except Model TA1660L which is Serial Communication and comes standard with a TACTRL2 control head
- Available in 5', 6', 7' or 8' lengths (specify length when ordering)
- All include cable and connectors
- Twenty-five foot, 16 conductor cable supplied with arrow (two piece arrows have 10' of inter-connect cable between light arrays)
- Meets MUTCD2000 specifications when mounted on appropriate backboard

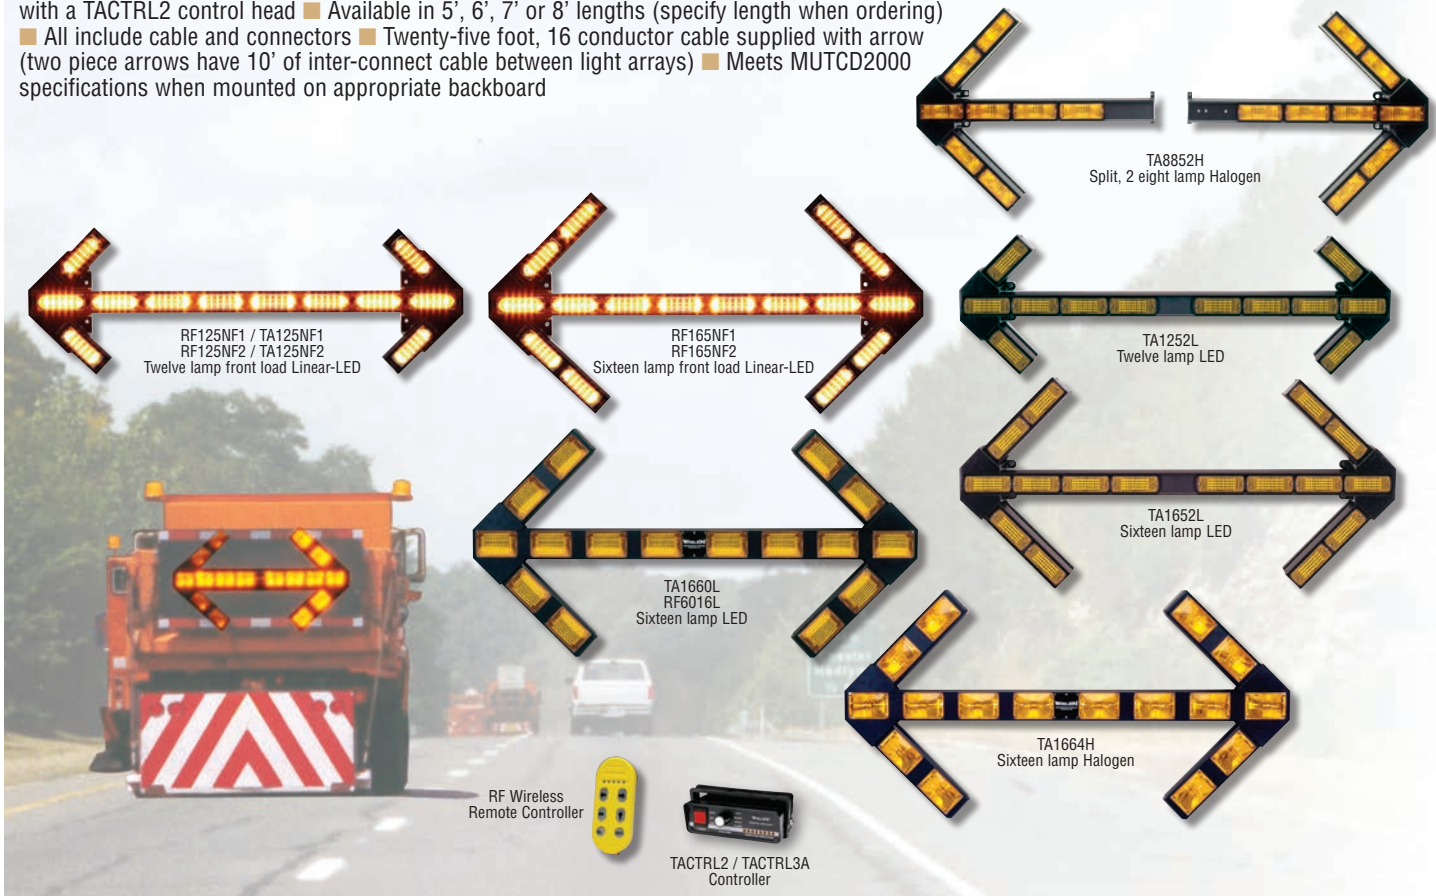

Model	Technology	Total & Size of Modules	Power Cable	Mount	Control Head	VDC	Housing	Size H x D x L	
TA8852H	500 Series Halogen	16 (5"x2")	25'	Surface mount/ slide bolt	TACTRL3A	12	Split 2 piece	23-1/4" (590mm) x 5-1/4" (133mm) x 27-11/16" (703mm, ea. section)	
TA1664H	600 Series Halogen	16 (6"x4")					One piece	36-1/2" (927mm) x 3-3/16" (81mm) x 5' (152cm), 6' (183cm), 7' (213cm), & 8' (244cm)	
TA1252L	500 Series LED	12 (5"x2")						16" (406mm) x 5-1/4" (133mm) x 48" (122cm)	
TA1652L		16 (5"x2")						23-1/4" (590mm) x 5-1/4" (133mm) x 48" (122cm)	
TA1660L	600 Series LED Serial Comm.	16 (6"x4")	40'		TACTRL2		36-1/2" (927mm) x 3-3/16" (81mm) x 5' (152cm), 6' (183cm), 7' (213cm), & 8' (244cm)		
TA125NF1	500 Series Linear	12 (5"x2")	25'		TACTRL3A		Front load one piece	16" (406mm) x 3-1/2" (89mm) x 46" (117cm)	
TA125NF2	Super-LED® Front Load		50'					23-1/4" (590mm) x 3-1/2" (89mm) x 46" (117cm)	
TA165NF1	500 Series Linear	25'	23-1/4" (590mm) x 3-1/2" (89mm) x 46" (117cm)						
TA165NF2	Super-LED Front Load	50'							
RF125NF1	500 Series Linear Super-LED Front Load Wireless Radio Control	12 (5"x2")	25'		RF6016L Wireless Remote Controller			Front load one piece	16" (406mm) x 3-1/2" (89mm) x 46" (117cm)
RF125NF2		50'	23-1/4" (590mm) x 3-1/2" (89mm) x 46" (117cm)						
RF165NF1		25'							
RF165NF2		16 (5"x2")	50'						
RF6016L	600 Series LED Front Load Wireless Radio Control	16 (6"x4")	30' TPR				36-1/2" (927mm) x 3-3/16" (81mm) x 48" (122cm)		